

UNITED STATES PATENT APPLICATION
FOR
SCALABLE NETWORK FILE SYSTEM

Inventors:

Jared Bobbitt
Justin Chen
Stephan Doll
John Fawcett
Marc Friedman
Chris Hickman
Ed Johnson
Ty Lam
Patrick Lau
Joe Mullally
Rob Smith
Jeff Tanner

Prepared By:

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN
12400 Wilshire Boulevard
Seventh Floor
Los Angeles, California 90025-1026
(425) 827-8600

Attorney's Docket No.: 004933.P002

"Express Mail" mailing label number: EL431687174USDate of Deposit October 19, 2000

I hereby certify that I am causing this paper or fee to be deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and that this paper or fee has been addressed to the Assistant Commissioner for Patents, Washington, D. C. 20231

Dominique C. Valentino

(Typed or printed name of person mailing paper or fee)

Dominique C. Valentino

(Signature of person mailing paper or fee)

10-19-00

(Date signed)

amount of storage capacity without affecting existing applications. Some sites are referring to these pre-determined modules as "cells" of storage. Due to their inherent storage structure, these cells impose a minimum level of granularity that may lead to an inefficient use of resources.

5 Modular storage systems are used because of inherently unpredictable storage requirements. A successful web site can exceed forecast storage requirements literally overnight. Some companies even resort to building out surplus capacity, and only "turning on" those resources as they are needed. For example, some online stock trading
10 companies are now sizing their infrastructure to handle peak loads that are 400 percent greater than normal. Storage problems such as these have spawned a new industry comprising companies that provide software, hardware, and services directed toward helping these
15 companies handle the peak loads that result from their rapid growth and successful marketing programs.

 Today, the most sophisticated sites must be architected with storage cells in order to support scalability. This requires an extensive amount of foresight, engineering and implementation to achieve. Other, less sophisticated sites are faced with the challenges of storage scalability
20 without such architectural assistance. These sites generally must learn to scale their systems through trial and error, a risky and painful approach to configuring mission-critical resources.

The foregoing problems make it clear that better storage solutions are needed by the marketplace. Preferably, these data storage solutions need to be extremely flexible by supporting "true" storage on demand.

Many vendors, both hardware and software, claim that their products

- 5 support storage on demand, but all such solutions require administration and re-configuration of various components of the system. For example, storage may have to be re-partitioned across a set of storage devices when new resources are added to a system.

- 10 "True" storage on demand means that granular components of storage may be added to the system in real-time, without affecting the operation of applications or other components. In addition to allowing the seamless addition of increments of storage, it is just as important that the solution has the capability of effectively managing the storage. The solution should provide a simple, easy-to-deploy system that does not
- 15 increase in management complexity as the storage capacity increases.

There are no integrated solutions of this type that provide "true" storage on demand capabilities in today's marketplace.

SUMMARY OF THE INVENTION

The present invention comprises an incrementally scalable file system and method that addresses many of the foregoing limitations found in the prior art. The system architecture enables file systems to be

5 scaled by adding resources, such as additional filers and/or file servers, without requiring that the system be taken offline. The system also provides for load balancing file accesses by distributing files across the various file storage resources in the system, as dictated by the relative capacities of said storage devices. The system provides one or more

10 "virtual" file system volumes in a manner that makes it appear that all of the file system's storage space resides on the virtual volume(s), while in reality the files may be stored on many more physical volumes on a plurality of filers and or file servers. This functionality is facilitated through the use of a software "virtualization" layer that intercepts file system

15 requests and remaps the virtual volume location to the actual physical location of the files on the various filers and file servers in the system. This scheme is implemented through the use of two software components: 1) an "agent" software module that determines and knows how files are distributed throughout the system, and 2) a "shim" that is

20 able to intercept file system requests. For Microsoft Windows clients, the shim is implemented as a file system filter. For Unix-variant clients, the shim is implemented as one or more NFS daemons. When new storage

resources are added to the file system, files from existing storage devices are migrated to the new resources in a manner that makes the migration invisible to client applications, and load balancing is obtained.

Other features and advantages of the present invention will be
5 apparent from the accompanying drawings and from the detailed
description that follows below.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing aspects and many of the attendant advantages of
this invention will become more readily appreciated as the same becomes
10 better understood by reference to the following detailed description, when
taken in conjunction with the accompanying drawings, wherein:

FIGURE 1 is a schematic diagram depicting a conventional file
system comprising a plurality of clients that access various NAS storage
devices and servers over a computer network;

15 FIGURE 2 is a schematic diagram depicting an exemplary
implementation of the present invention;

FIGURE 3 is a schematic diagram illustrating an exemplary
architecture corresponding to the present invention;

FIGURE 4 is a schematic diagram corresponding to the
20 conventional file system of FIGURE 1 that depicts various root directory
paths corresponding to NAS storage devices on which those root
directories are stored;

FIGURE 5 is a schematic diagram that illustrates the virtual volume file system provided by the present invention;

FIGURE 6 shows an exemplary virtual volume subdirectory and file name and how such is mapped to a physical subdirectory and file on a storage device through use of an embedded pointer;

FIGURE 7 shows another exemplary Master directory that includes a split-directory;

FIGURES 8A-C show a fragment map before, during, and after a file migration operation, respectively;

FIGURE 9 is a flowchart illustrating the logic used by the invention when migrating files; and

FIGURE 10 is a schematic diagram of an exemplary computer that may be implemented in the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention enables file systems to be easily scaled through the use of a “virtualized” file system scheme. The term “virtualized” refers to the invention’s ability to enable the creation of one or more virtual file systems that may be hosted on one or more physical devices, but without applications having knowledge of the physical devices. In the following description, the term “Venus” will be used throughout to refer to an exemplary system implementation of the invention.

10 **Definitions**

Several terms used in the following description of the exemplary preferred embodiments of the invention and as used in the claims that follow thereafter will be defined. A *filer*, *server* or *file server* is a storage machine on which files can be stored and accessed. A *volume* is a fixed-size sequence of disk blocks on a file server. Each volume has a total size and free space. A *share* or *export* is the root directory of a directory tree that the server hosts and allows other remote machines to access. “Share” is a Windows term, while “export” is a UNIX term. A share is assigned to a single server volume, although there may be several shares sharing a volume. A share is associated with a directory on that volume. It also has a share name, which is the name that clients use to refer to the share’s associated directory. A given share/export cannot span multiple

volumes.

A *Venus Virtual Volume* (V_{VV}) is a single directory hierarchy that spans one or more filers. It has an alphanumeric name, a master filer, and a set of partitions. To a client, a V_{VV} has a local hostname (Venus), and root path (v_{vv}name), and optional alternative names (drive letters under Windows, paths under UNIX). A *partition* is a slice of a V_{VV} that resides in a particular share/export on a particular filer. A partition is associated with a particular V_{VV} and has an index in that V_{VV}, a filer index (filers associated with a V_{VV} are numbered independently of other V_{VV}s), and a root exported by the filer. Every partition resides on a single share/export and thus a single disk volume of a single filer.

A Venus client is any computer running applications that access files on a VVV. A Venus administrator is a computer running the Venus administration tool. It may or may not be a Venus client, and is installed separately from the Venus client software. A Venus administrator can communicate with remote clients via TCP/IP and servers via SNMP.

A Conventional Approach

FIGURE 1 shows a conventional network storage scheme that enables applications running on various client machines, including a web server 10, and NT client 11, an application server 12, a UNIX client 13, and a database server 14 to access files (i.e., store, retrieve, update, delete) stored on NAS (Network Attached Storage) filers 16, 18, and 20.

clients to one or more NAS devices can be a burdensome task under the conventional scheme.

System Architecture

The present invention addresses many of the limitations of the conventional scheme through the use of a flexible, scalable infrastructure for “virtualizing” and managing data resources. Architecturally, the scheme is implemented through a storage abstraction layer that sits between clients and data sources. The primary purpose of the layer is to virtualize the data sources from the perspective of the client. In other words, the invention makes it appear to each client application that it has access to one or more virtual data sources having a capacity equal to the combined capacities of the individual storage devices being virtualized.

With reference to FIGURE 2, a storage abstraction layer 26 resides between each client and network 22. The scheme also provides for use of non-NAS file system devices, including a file server 24. As described in further detail below, storage abstraction layer 26 comprises several software components to provide each application with one or more Venus virtual volumes (VVVs), wherein each VVV may be hosted on any or all of the storage devices connected to the network, and the application need not know what device(s) or even what type(s) of device on which its data is stored.

An exemplary configuration 28 of a heterogeneous operating

important functions corresponding to storage abstraction layer 26,
including mapping file system requests from a virtual volume into physical
volumes residing on NAS filers 16 and 18. The remapped file requests
are then received by FS driver 30, which processes the file requests
5 through use of a CIFS server, as depicted by CIFS servers 36 and 37,
which respectively reside on NAS filers 16 and 18. The Windows
2000/NT implementation also includes a WinAgent 38, which is
responsible for initializing the global state, shared memory, configuration
changes, client-to-client communication, administration tool requests,
10 statistics gathering, data migration, and distribution locks, further details of
which are also explained below.

As discussed above, the invention provides a scheme that
virtualizes a file system. One benefit of virtualizing a file system is that
client applications and operating systems no longer have to keep track of
15 where files are physically stored on the file system. In addition, the
scheme allows files to be moved between various file system storage
devices without affecting the operation of the applications, further details
of which are described below.

A comparison of the conventional file system scheme shown in
20 FIGURE 4 and the scheme of the present invention shown in FIGURE 5
illustrates some of the benefits the invention provides. In the conventional
scheme, each client application and/or operating system must keep track

of where it stores its files. For example, applications running on web server 10 store files on NAS filer 16 under a root directory of \\nas1\root and stores files on NAS filer 18 under a root directory of \\nas2\root. Similar root directories are shown adjacent to the other client machines in the Figure.

Under the invention's virtual volume scheme shown in FIGURE 5, each client application stores files in a virtual volume 51 under the same root directory, an example of which is identified as "\\vvv\root" in the Figure. On the backend of the system, the virtual volume is mapped to physical volumes stored on the systems various filers and file servers, further details of which are discussed below. The scheme provides each client application with a file system interface that facilitates "fixed" virtual directory paths, while not requiring the applications to know the actual physical locations of the directories and files.

The components for an exemplary implementation of the invention under a UNIX environment are shown in the lower left-hand box of FIGURE 3, which corresponds to UNIX client 13. File system access operations under UNIX implementations of the invention are similar to those under Windows environments, except the tasks are handled via a different set of components. Under UNIX implementations, Venus interposes the file system access process by mapping ("mounting") the NFS volumes in a VVV to a local modified Venus NFS daemon (RNFSFD)

running on the client. This daemon then creates requests to a remote NFS daemon on the NAS filer. RNFSD performs functions that are substantially similar to functions performed by VFD 34 in Windows environments.

5 Suppose an application 40 issues file system requests, such as ReadFile or WriteFile requests, to a UNIX kernel 42. UNIX kernel 42 then communicates with one of several RNFSDs 44 operating within a shared memory space 46 on UNIX client 13. RNFSDs 44 are enabled to access files via remote procedure calls (RPCs) to NFS daemons 48 and 49,
10 respectively residing on NAS filers 16 and 18. The UNIX implementation also includes a UNIXAgent 50 that performs similar functions to WINAgent 38 discussed above.


 Suppose that application 40 running on UNIX client 13 desires to access a file via NFS on NAS filer 18. Application 40 issues a read
15 request, which is serviced by a kernel thread spawned by kernel 42. The kernel thread resolves the file system and file system type to discover that the file resides on NAS filer 18 and that NAS filer 18 implements an NFS file system. The kernel passes the request to the NFS client code, which typically resides in the kernel. The NFS protocol uses a set of NFS
20 daemons on an NFS host machine (e.g., NFS daemons 49 on NAS filer 18) as (often single-threaded) RPC servers. An instance of RNFSD 44 makes an RPC request to NFS daemon 49 on NAS filer 18,

which processes the request by performing a read file action.

A more detailed file transfer sequence corresponding to a UNIX environment is now presented. Consider a UNIX shell on UNIX client 13 executing command "cat /venus/vvv1/homes/marc/.cshrc." Application 40 will issue an open() command on the full path, receiving a handle for the file. Then it will execute a series of read() commands to get fixed-size sequential chunks of data. UNIX kernel 42 will receive the open() command and begin processing from the left of the path. It sees that /venus/vvv1 is the mount point for an NFS server residing on UNIX client 13 (actually RNFSD 44, but the kernel doesn't know the difference). UNIX kernel 42 has a handle for each such mount point (e.g., VH0). It sends "LOOKUP(VH0, "homes")" to RNFSD 44; RNFSD 44 will then route that request to the proper server. Note that VH0 is a "Venus handle" created by Venus, local to this client. RNFSD 44 knows which NAS filer hosts a file just by looking at the simple name – in this case let's say "homes" maps to NAS filer 16. RNFSD 44 has kept the handle FH0 (this is the "Filer handle" provided by NAS filer 16) for /venus/vvv1 from the call that mounted the volume in the first place, so it forwards the message "LOOKUP(FH0, "homes")." This returns a new NAS filer 16 handle for "homes", FH1. Venus creates another handle, VH1, and returns it to UNIX kernel 42. The kernel then issues "LOOKUP(VH1, "marc")" to RNFSD 44, etc., until eventually it has a handle VH3 for ".cshrc", which it

returns to application 40. Note that this may result in calls to different remote servers, depending on the name. The read command from the application generates a read from the kernel to RNFSD 44,
 "READ(start+i,VH3,chunksize)." RNFSD 44 translates the handle and
 5 routes in the same manner.

The following sequence graphically depicts the foregoing process:

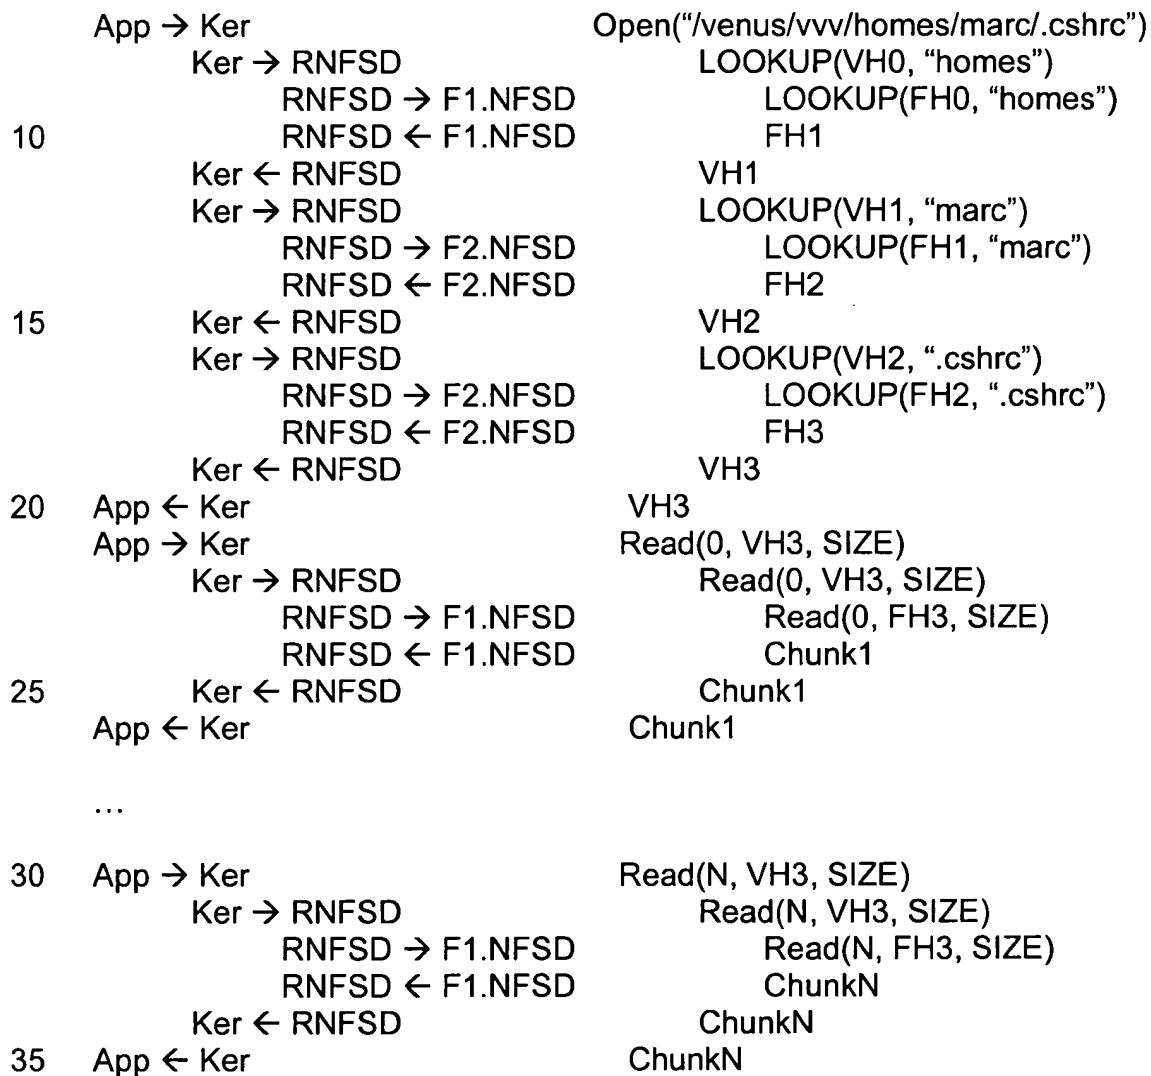

As discussed above, Venus virtualizes the storage space on

various NAS devices and file servers to which clients are connected such that applications running on those clients can store data on any connected storage device without needing to know what actual volume or directory path on which the data are stored. The application only “sees” a small number of virtual volumes, typically only one or two. In order to provide this functionality, it is necessary to maintain configuration information that maps the directory paths on the virtual volumes into actual volumes and directory paths provided at the backend by the various NAS filers and file servers connected to the network. In addition, the configurations need to be initialized prior to becoming functional. This task is performed by an administration tool 52, which provides a user interface (UI) for configuring VVV volumes and the corresponding directory structures on filers and file servers in the system.

Administration tool 52 may be configured to run on a separate machine, such as a management console machine 53 shown in FIGURE 5, or run on one of the client machines. Administration tool 52 communicates with the various client agents via the TCP/IP protocol. It communicates with the filers and servers via the Simple Network Management Protocol (SNMP). Further details of some of the functionality performed by Administration tool 52 are discussed below.

Partitioning

A Venus virtual volume (VVV) comprises a single directory tree with

problem, the present invention provides a partitioning scheme for "splitting" directories when they become or already are too large. In general, split directories will be a rare exception; most directories will not be or need to be split.

5 A split directory has multiple UIDs, pointers, and slaves. Each UID is associated with a sequential index starting with zero (i.e., the sequence number). This index is stored in the pointer. The number of partitions, or *fanout*, for a split directory is some power of 2. Preferably, files in such directories are distributed among the split directories by using a 32-bit
10 hash of their name, mod the fanout value. An example of a directory that has been split into two halves is shown in FIGURE 7. Directory entries 54 and 56 have a common parent directory (/D) but have different sequence numbers and different UID values. As described below, files are moved to new directories from a split directory in a process known as "mini-
15 migration."

 In accordance with the partitioning scheme of the invention, a slave can be found by using a two stage mapping: UID → Fragment →
Partition. As discussed above, the fragment is specified by the first 3 characters of the UID. The fragment-to-partition mapping is stored in a
20 shared array called the fragment map that is stored on at least one filer. Such a fragment map is described below with reference to FIGURES 8A-C. An in-memory copy of the fragment map is also stored by each of the

WINAgents and UNIXAgents, and changes to the fragment map are propagated to these agents when such events occur.

The following example illustrates the creation of a new directory under NFS. The process will be initiated by calling NFS Create

A UID is chosen at random. The slave directory

10 "F2:/share/slave/UID" is then created on filer F2. This requires finding the handle of "F2:/share/slave." The attributes of the slave are then set to standard slave attributes. The master directory "F1:/share/master/a/b" with attributes implied by the caller is next created on filer F1. A pointer "F1:/share/master/a/b/.aaaa00[UID] with Venus as its owner and all

15 permissions granted is then created on filer F1.

Now an example of opening a file is presented. Opening a file is initiated by calling NFS Open File(/a/b/c.txt, permission = READ). This will return a handle H(b) to the client of "F1:/share/master/a/b" through a normal NFS open file process, and call LOOKUP(F1, H(b), "c.txt"). In

20 generally, LOOKUP doesn't indicate the type, so it doesn't know whether it's looking for a directory or a file. The system would then look for "c.txt" in the master directory (passing through the LOOKUP command), which

will produce a negative result, since "c.txt" is not a directory. As a result, "c.txt" is correctly assumed to be a file, and REaddir(F1, H(b)) is called to list the directory. The directory is searched for any pointers. If the filer guarantees ordering, this requires scanning only until the items searched
5 exceed the prefix in alphabetical order. Otherwise, the entire master directory must be searched to verify whether the file exists or not.

The fanout is then counted, and the pointers are put in an array ordered by sequence number. Preferably, this array will be cached on clients, as described below. A hash function is performed comprising
10 ("c.txt") *mod* fanout to determine which pointer to use. For that pointer p, the filer F(p) on which the file resides can be extracted from the fragment map, get the handle of $F(p) : /share/slave$, and LOOKUP(F(p), $H(F(p) : /share/slave), "c.txt")$.

File Migration and Load Balancing

15 One of the most important aspects of the invention concerns the system's ability to load balance file usage. This is accomplished by maintaining the proper distribution of files on each filer and file server through the proper distribution of directories, as dictated by the relative capacities of each filer and file server. The invention also enables
20 administrators to add additional storage devices (e.g., a new filer) on the fly, while simultaneously providing access to existing files. In order to provide proper load balancing, it is necessary move a portion of the files

Migration operations are carried out by two closely coupled components that are part of the applicable Venus agent for the file system (i.e., WINAgent 38 for CIFS environments and UNIXAgent 50 for NFS environments). These components are the VLM and a Migration Manager 5 (MM), which work on transitioning fragments to ensure that the fragments are safely moved while the underlying files are not in use by clients. As shown in FIGURES 8A-C, which respectively depict a fragment map 58 before, during, and after a migration, each transitioning fragment has a source filer 60, a destination filer 62, and a client 64 corresponding to the 10 client that is controlling the migration. The Migration Manager's job is to move the files in its assigned fragments from source filer 60 to destination filer 62. The VLM's job is to make sure the migration is undetectable to applications running on the clients.

The VLM introduces centralized lock management on a per- 15 fragment basis. To minimize this traffic, it is important that only a small fraction of the fragments are in transition at any given time. Note, however, that there is no single centralized client responsible for performing all lock management. Lock management can be distributed amongst multiple clients. Multiple clients may be concurrently operating 20 as VLMs for distinct subsets of transitioning fragments. This ensures that no single client becomes a bottleneck for lock management.

The VLM lock protocol is necessary for two reasons. Firstly, it

stops the migration of that file and stops using it, thus releasing any locks it had on the file. The client is now able to access the file without interruption from the MM.

It is important to note that locks may be stolen by both CIFS and NFS clients. The reason for this is to ensure that the migration process is completely transparent to the client. If a client wants to access a file that is currently being migrated, the MM will stop such migration immediately and give up its lock. When a lock is stolen from the MM, the MM puts the file in a "go-back" queue that includes identities of files to be migrated at a later time when the corresponding client tokens expire, further details of which are discussed below.

Suppose that an initial configuration includes two filers, labeled 1 and 2 in source column 60 in fragment map 58 of FIGURES 8A-C. An operator of the system adds a third filer (labeled 3) to the configuration to increase storage capacity. Rather than just put new files on filer 3 as they are created, it is preferable to load-balance all of the file storage resources in a system, e.g., filers 1-3 in the present example. In accord with the invention, this comprises migrating fragments from each of filers 1 and 2 to filer 3.

As discussed above, the fragment identification portion of each UID comprises the first three hex characters. In the example in FIGURES 8A-C, the number of fragments is set to 4096. Accordingly, each VVV may

be partitioned into a maximum of 4096 fragments. Preferably, the directories will be assigned to fragments at random, although other fragment-to-directory allocation schemes may be used as well. The assignments of fragments to partitions (and thus to filers) will be

5 substantially balanced, but need not be sequential. FIGURE 8A shows an initial configuration condition where the first half of the fragments is on filer 1, and the second half is on filer 2. Load-balancing migration will consist of moving approximately one third of the file data on filer 1 to filer 3, and one third of the file data on filer 2 to filer 3. FIGURES 8A-C illustrate this

10 by moving the last one-third of the fragments on each of filers 1 and 2 to filer 3.

Although all of these fragments need to be moved, it is preferable that only a small number will be transitioning at any one time. Suppose that fragments 1366 – 1370 are moved first. When fragments are

15 transitioning, their destination filer is set, and the corresponding transitioning value 66 is changed from a 0 (Boolean FALSE) to a 1 (Boolean TRUE), as shown in FIGURE 8B.

It is noted that in the foregoing example, the maximum number of fragments was set to 4096 and the fragments are specified by a 3 hex

20 digit value. These are for illustrative purposes only; other values for the maximum number of fragments may be used, as well as other fragment specification schemes, as will be recognized by those skilled in the art.

In a block 80 the migration starts threads responsible for some set of fragments to be moved on a single filer. While a Migration Manager may service multiple sources, each migration thread should only service a single source. Each thread parses its corresponding source slave directory tree, as provided by a block 82, to identify the files in the fragments to be migrated. Under the NFS file system, this requires UNIXAgent 50 to access the source filer's file system directly in UNIX, while for CIFS file systems the physical volume name is used as a prefix when identifying the appropriate files.

-29-

in the go-back queue in accord with block 86.

Each Migration Manager maintains a go-back queue containing the identification of files that were skipped, preempted from being migrated, or had a failure occur during migration. If there was a failure during the copy or delete operation, the file is placed on the queue with a wake-up time of a predetermined polling period. If the file was skipped because a token was in use, the VLM will return the time the file will be accessible again (i.e. the expiration time of the token). Another attempt at migrating the file will then be performed at this point. If the file was preempted, it is set to wake-up at a period of one MAXDURATION from the current time.

When the Migration Manager completes its work, it changes the configuration data for each VVV on each filer, to indicate the fragment(s) is (are) no longer transitioning, and the MM/VLM is no longer serving the fragment(s). In addition, the VLM drops all tables and stops recording tokens. Eventually, each of the clients will be forwarded the new configuration information and stop asking its corresponding VLM for tokens.

As discussed above, when a directory is very large to begin with or becomes very large, it is desirable to split the directory. In this instance, the files in the split directory are migrated to new directories using a "mini-migration" process. In short, the mini-migration process is substantially similar to a normal migration process, except that certain additional

information needs to be accounted for.

For mini-migration, there needs to be an entry in the configuration information, a transitioning state, VLM locking, checking of both the source and destination, and a Migration Manager. Only one directory should be mini-migrated at a time. New UIDs must be selected in fragments that reside on different filers from the existing ones. The following information is appended to the configuration information while a mini-migration is in progress: the former fanout (i.e. number of splits) of the directory, the IP address of the Migration Manager, the source sequence of UIDs, and the destination sequence of UIDs. In addition, mini-migration must wait one full configuration expiration period before moving any files.

Exemplary Computer System for use as Client Machines in System

With reference to FIGURE 10, a generally conventional computer 200 is illustrated, which is suitable for use in connection with practicing the present invention, and may be used for the various clients in the system, as well as for running Administration tool 52. Examples of computers that may be suitable for clients as discussed above include PC-class systems operating the Windows NT or Windows 2000 operating systems, Sun workstations operating the UNIX-based Solaris operating system, and various computer architectures that implement LINUX

operating systems. Computer 200 is also intended to encompass various server architectures as well. Alternatively, other similar types of computers may be used, including computers with multiple processors.

Computer 200 includes a processor chassis 202 in which are

5 mounted a floppy disk drive 204, a hard drive 206, a motherboard populated with appropriate integrated circuits (not shown) including memory and one or more processors, and a power supply (also not shown), as are generally well known to those of ordinary skill in the art. It

10 will be understood that hard drive 206 may comprise a single unit, or multiple hard drives, and may optionally reside outside of computer server 200. A monitor 208 is included for displaying graphics and text generated by software programs and program modules that are run by the computer server. A mouse 210 (or other pointing device) may be

15 connected to a serial port (or to a bus port or USB port) on the rear of processor chassis 202, and signals from mouse 210 are conveyed to the motherboard to control a cursor on the display and to select text, menu options, and graphic components displayed on monitor 208 by software programs and modules executing on the computer. In addition, a

20 keyboard 212 is coupled to the motherboard for user entry of text and commands that affect the running of software programs executing on the computer. Computer 200 also includes a network interface card (not

shown) for connecting the computer to a computer network, such as a local area network, wide area network, or the Internet

Computer 200 may also optionally include a compact disk-read only memory (CD-ROM) drive 214 into which a CD-ROM disk may be inserted so that executable files and data on the disk can be read for transfer into the memory and/or into storage on hard drive 206 of computer 200. Other mass memory storage devices such as an optical recorded medium or DVD drive may be included. The machine instructions comprising the software program that causes the CPU to implement the functions of the present invention that have been discussed above will likely be distributed on floppy disks or CD-ROMs (or other memory media) and stored in the hard drive until loaded into random access memory (RAM) for execution by the CPU. Optionally, the machine instructions may be loaded via a computer network.

Although the present invention has been described in connection with a preferred form of practicing it and modifications thereto, those of ordinary skill in the art will understand that many other modifications can be made to the invention within the scope of the claims that follow. Accordingly, it is not intended that the scope of the invention in any way be limited by the above description, but instead be determined entirely by reference to the claims that follow.